





LAFAYETTE
UTILITIES SYSTEM
ENGINEERING DIVISION

APPA LINEMAN RODEO - 2024
12KV 900AMP SWITCH CHANGE OUT
JOURNEYMAN

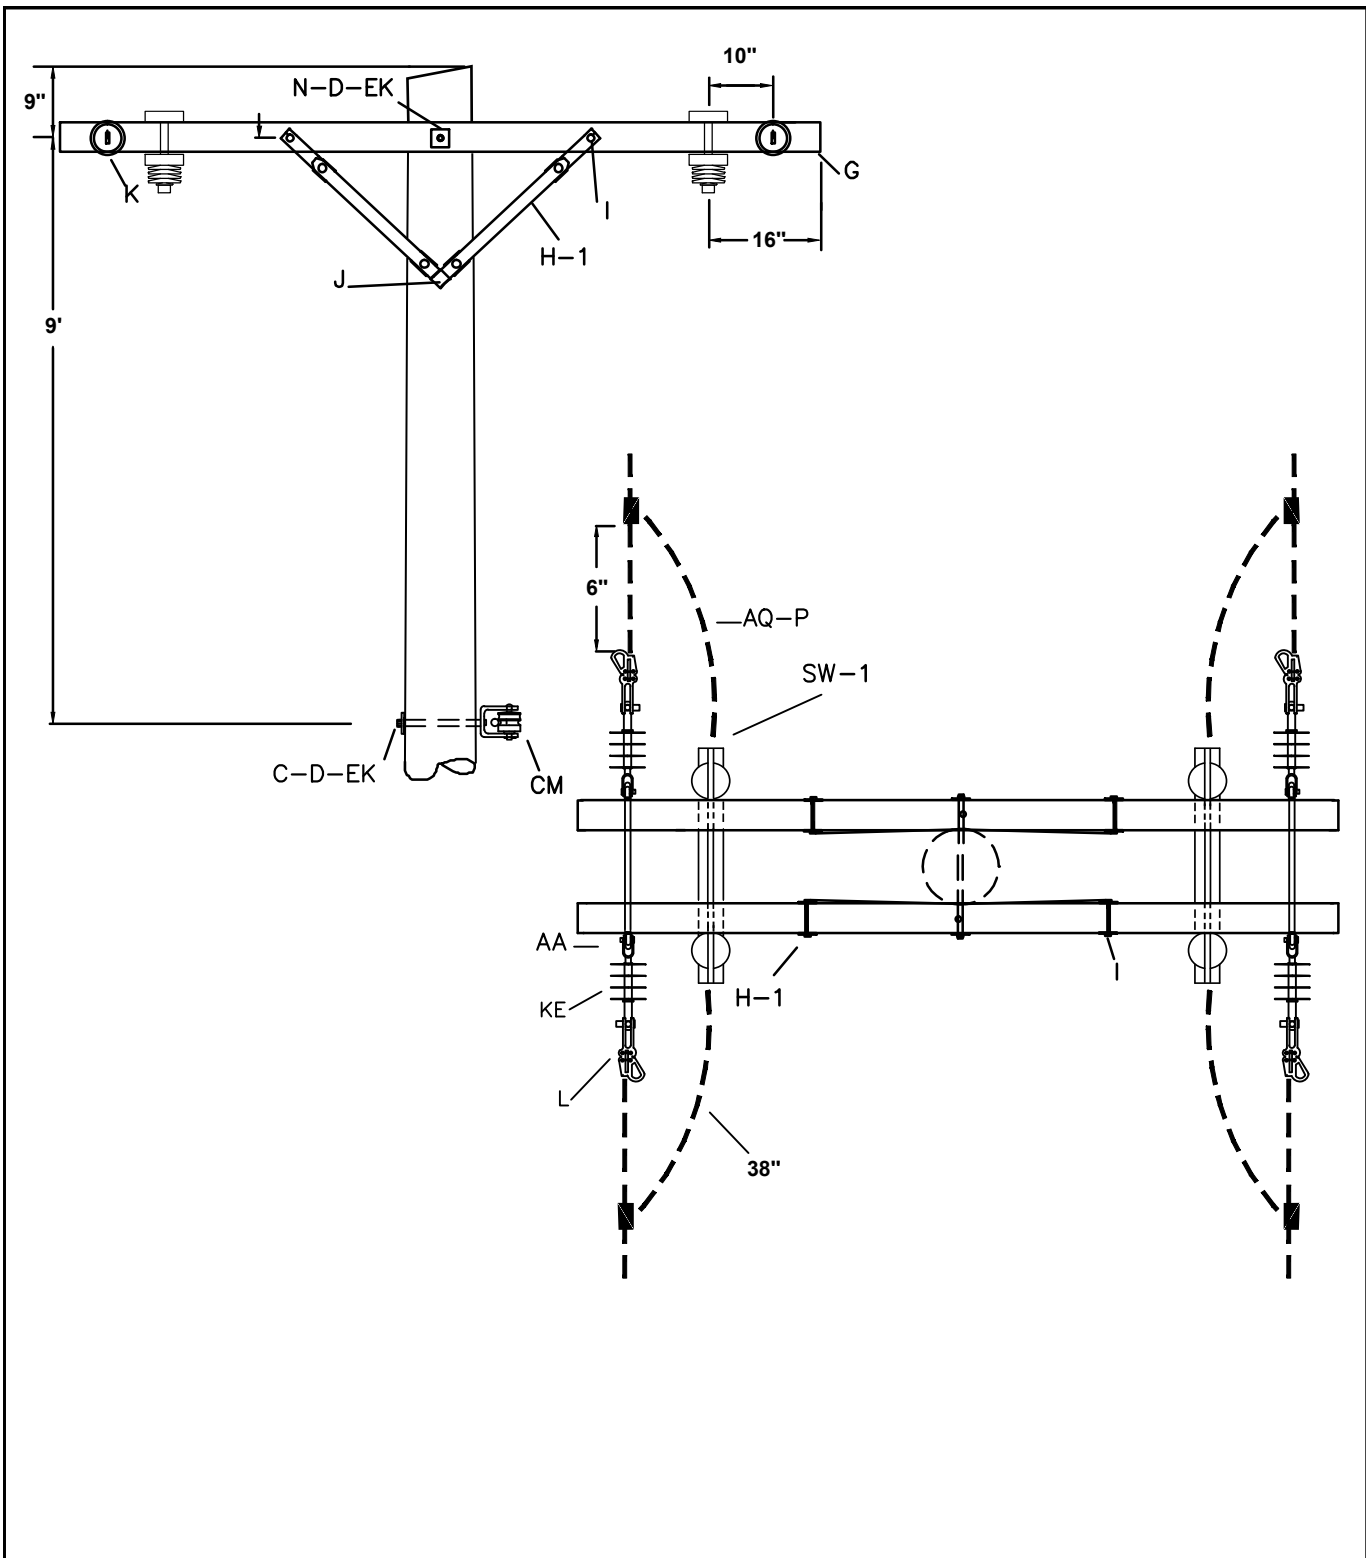

DATE:	SCALE: NTS
DRAWN BY:	CHECKED:
REVISED:	APPROVED:

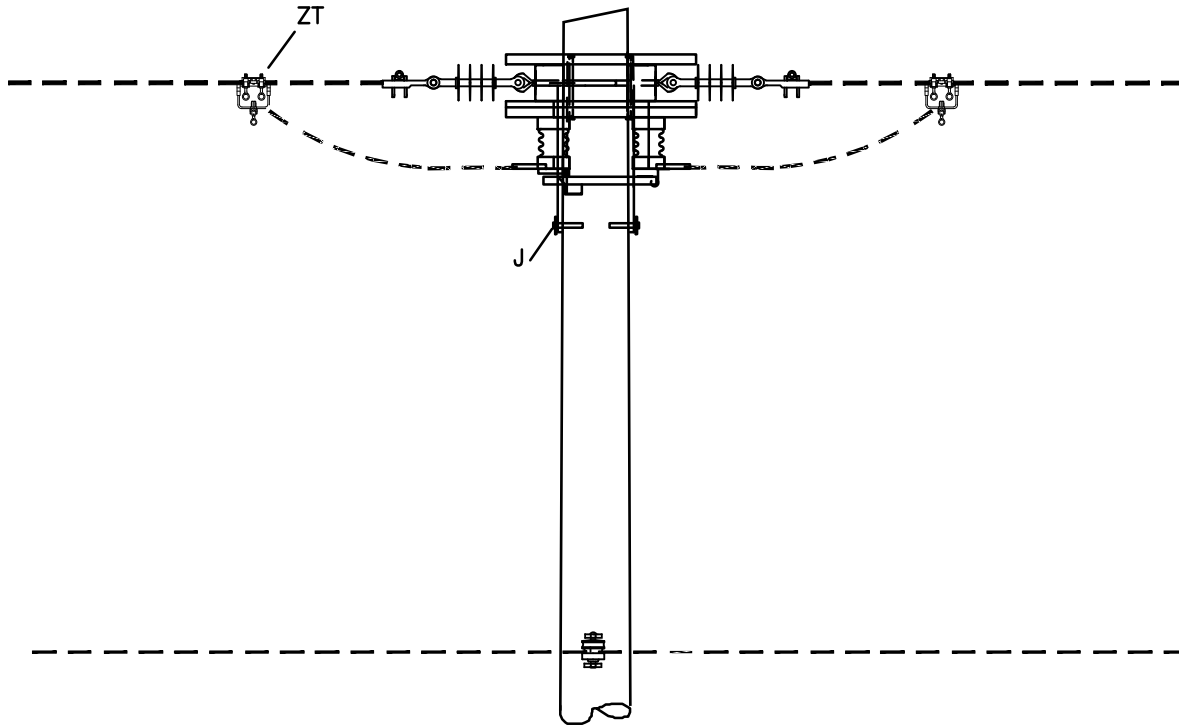

ITEM	CAT NO	QUANTITY	DESCRIPTION
C	J8812	1	BOLT, MACHINE, 5/8" X 12"
N	C8872	3	BOLT, DOUBLE ARMING, 5/8" X 22"
EK	J8583	12	LOCKNUT, 5/8"
AA	J1092	4	EYENUT, 5/8"
J	J8754P	2	SCREW, LAG, 1/2" X 4"
D	J1075	10	WASHER, SQUARE, 2-1/4" x 2-1/4"
I	J8634-1/2	4	BOLT, CARRIAGE, 3/8" X 4-1/2"
H-1	2023	4	CROSSARM BRACE, WOOD, 28"
G	BROOKS 3-1/2"X4-1/2"X8'	2	CROSSARM, WOOD, 3-1/2"X4-1/2"X8'
ZT	AHLS024019ETB	4	STIRRUP, MECHANICAL, #2 PRIMARY
SW-1	M3D96B	2	SWITCH DISCONNECT, 900 AMP, 1 PH.
L	ADEZ47N	4	CLAMP, DEADEND, SIDE OPENING, #2 PRIMARY
KE	ARP-15SKCE-S	4	INSULATOR, SUSPENSION, 15kV, TYPE E
CM	NP53-2/2335320-7001	2	INSULATOR, SPOOL, WHITE
AQ-P	#2-7St. SD SPL 25# Bare	13'	WIRE, #2 COPPER, JUMPER, PRIMARY
	J093	1	CLEVIS
	CLND-2-12-134	4	2 HOLE PAD
	HLA2/0T	4	HOT LINE CLAMP, SMALL
	PBA25	8	BOLT, 1/2" X 2" STAINLESS STEEL

LAFAYETTE
UTILITIES SYSTEM
ENGINEERING DIVISION

APPA LINEMAN RODEO - 2024 12KV
900AMP SWITCH CHANGE OUT
JOURNEYMAN



DATE:	SCALE:	NTS
DRAWN BY:	CHECKED:	
REVISED:	APPROVED:	















