




ITEM	CAT NO	QUANTITY	DESCRIPTION
A-1	VI-606R	1	INSULATOR, PIN TYPE, 13.8kV
B	J744Z	1	PIN, STEEL, POLE TOP - MACLEAN
BV-DP	AR-0114	1	ARMOR ROD, #2 ACSR, PRIMARY
BV-DN	AR-0114	1	ARMOR ROD, #2 ACSR, NEUTRAL
C	J8812	3	BOLT, MACHINE, 5/8" X 12"
CM	NP53-2/2335320-7001	1	INSULATOR, SPOOL, WHITE
D	J1075	3	WASHER, SQUARE, 2-1/4" X 2-1/4"
DA	J093	1	CLEVIS
DTIE	UTF 1208	1	WRAPLOCK, 4/0 PRIMARY
DTIE	EZ SP 4378	1	WRAPLOCK, 4/0 NEUTRAL
EK	J8583	3	LOCKNUT, 5/8"
O	J9412	2	EYEBOLT, 5/8" X 10"
Z	XS-1000-B	2	UNIVERSAL STRINGING BLOCK, W/ 3030 Y-BALL FITTING - S+R

LAFAYETTE
UTILITIES SYSTEM
ENGINEERING DIVISION

APPA LINEMAN RODEO - 2024
SINGLE PHASE CONDUCTOR
TIE IN WITH ARMOR RODS
APPRENTICE

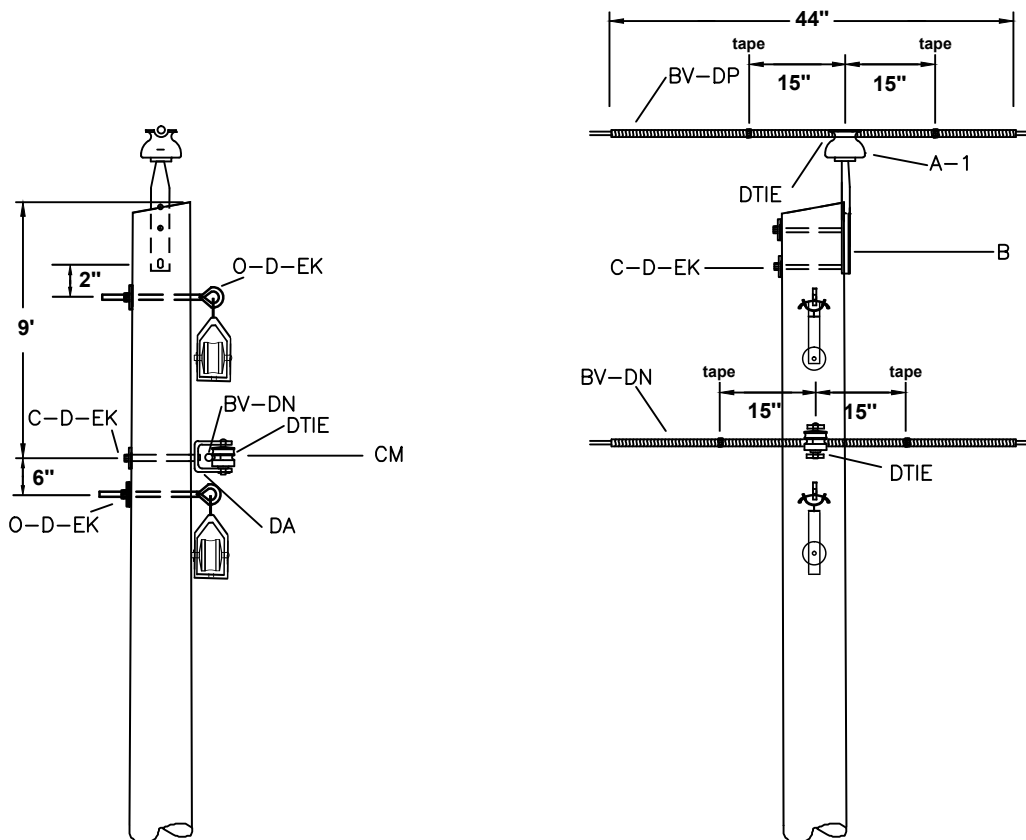

DATE: SCALE: NTS
DRAWN BY: CHECKED:
REVISED: APPROVED:



U.S.A.
CHATTANOOGA, TENNESSEE
SHERMAN & REILLY, INC.
WITH SER ADAPTERS
LUG MOUNT ONLY
BALL FITTINGS
USE ONLY PROPER
SOCKET CONNECTOR
SUSPEND ONLY BY
OPEN

ASTM A572-50
60-80 50K



2500 LB Max W.L.

MODEL

XS-100-B

676-002

111111

















